

# Coffee Vending Machine - LEI 200





# AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22











### USER INTERFACE

- Touchable selections panel with 12 push buttons that can be configured as selections or pre-selections.
- Alphanumerical keypad consisting of 12 buttons that can be used to manage a slave spiral machine. End Selection Acoustic Signal.
- 7 inch LCD screen that makes the machine communicative and engaging. It displays attractive images and messages for a great vending experience.
- End selection acoustic signal.
- Customisable sugar dosage
- Display consisting of 32 digits alphanumeric display.
- 170 mm high illuminated cup station, with the capacity of hosting a jug. Also equipped with a foldaway small cup holder available on the semi automatic version.
- Automatic version equipped with a slow product falling dispenser.



# LEI 200 SPECIFICATIONS

#### **ELECTRICAL SUPPLY**


230 Vac - 50 Hz / 120 Vac - 60 Hz

#### INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the boiler resistances, the pump and the steamventilator that are at 230 Vac – 50 Hz or 120 Vac – 60 Hz


#### **POWER SUPPLY**

- 1.80 kW single boiler espresso version
- 2.50 kW double boiler espresso version

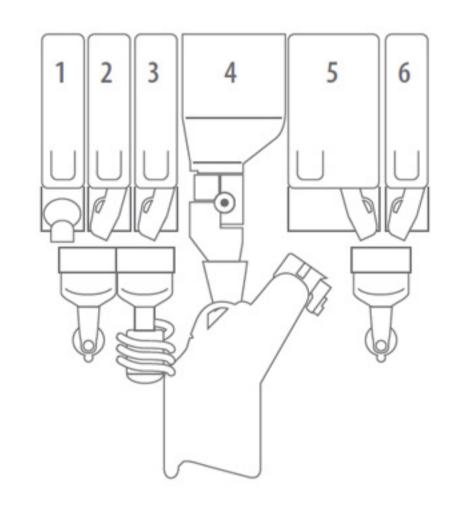

LEI SA ESPRESSO

- 1. TEA
- 2. COFFEE
- 3. MILK
- 4. CHOCOLATE

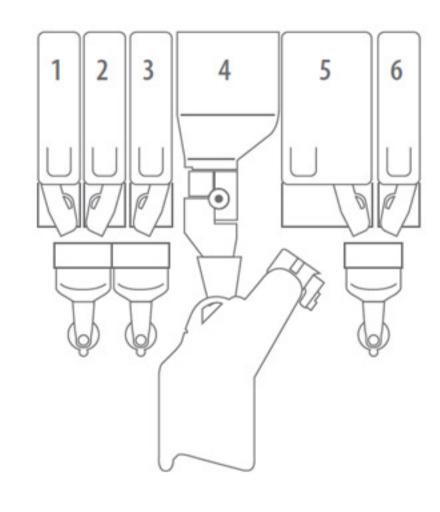

LEI SA INSTANT

- 1. SUGAR
- 2. COFFEE
- 3. MILK
- 4. CHOCOLATE

5. TEA

#### **WATER SUPPLY**

Fitting connection = 3/4'' / Water pressure = 0.5 - 6.5 bar

# AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22 sales@ausboxgroup.com.au











VERSIONS LEI 200	E4S ESPR ESSO SI NGLE BOILER AUTOMATIC *	E4S ESPR ESSO DOUBLE BOILER AUTOMATIC *	E5S ESPR ESSO SI NGLE BOILER SEMI AUTOMATIC *	E5S ESPR ESSO DOUBLE BOILER SEMI AUTOMATIC *
COffEE BEANS	1	1	1	1
SU GAR CANIS TER	1	1	_	_
INSTANT CANIS TERS	4	4	5	5
DIMENSIONS	H 745 mm x W 510 mm x D 600 mm WEIGHT 51 kg (espresso automatic version)			
CABINET	H 786,5 mm x W 510 mm x D 555 mm (without wall bracket). Depth including wall bracket 610 mm.			

<sup>\*</sup> models available also with LCD version.

## FEATURES

- Wide selection versions and great configuration flexibility.
- Automatic and semi automatic with water system supply. Also with autonomous tank inside the base cabinet.Instant Coffee boiler- 2000 W & 3.6 litres
- Models available with integrated 7 inch LCD that displays messages and images.
- Extractable mixers and boiler assembly that enables easier maintenance.
- Equipped with standard serpentine kit for tea.
- Door lock with programmable code.
- Cup dispenser can be adjusted between 70-75 mm diameters. Dispenser can also function well for 90 or 105 mm stirrers.
- Standard espresso boiler: 1500 W and 150 cc. Additional boiler of 700 W- 180 cc can be added to convert it into a Double Boiler.
- Liquid waste tray of the capacity of 2 litres equipped with electronically operated safety block for maximum water level.
- Coffee grounds waste tray for 200 pucks.
- Espresso double boiler version equipped with a pre heating boiler with electronic temperature management system.
- Switching power supply ensures stability of the instant product dose and electric safety protections.
- Multi- protocol electronics.

# AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22 sales@ausboxgroup.com.au













### PAYMENT SYSTEM

- Can work in master/slave with only one set of payment systems on the hot vending machine together with a refrigerated automatic spiral vending machine for the sale of snacks, cans and bottles, increasing selling opportunities.
- Compatible with all system of payment available on the market.

# ACCESSORIES KIT

- Base cabinet or predisposed for payment systems.
- Raised base kit to bring machine + cabinet to an height of 163 cm.
- Free vend panel.
- Autonomous pump kit that can be assembled inside the base cabinet.
- Side module kit with change-giver to be used when combined with slave spiral machine underneath.
- Cup sensor (automatic version).
- Kit chip clock (for energy saving mode and promotional activities).
- RS232 module.
- EXE/MDB kit.
- Visuals mart programmer speed that allows the upload of the firmware and settings and the download of the settings and audit without a pC.
- Telemetry kit (Gprs modem with antenna + clock chip).

## **ENVIRONMENT**

- Backlighted keyboard with led.
- Compatible with paper cups and wooden spoons.
- OPTION: cup sensor to reduce the consumption of plastic cups and to deliver a beverage in a mug (automatic version).
- OPTION: energy saving mod to reduce the energy cunsumption when the machine is in stand by.
- In compliance with RHOS and WEEE.



AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22 sales@ausboxgroup.com.au







