

Necta Rondo - Combination Vending Machine





AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22 sales@ausboxgroup.com.au











User Interface

- Easy identification of items due to optimum visibility.
- Blue alphanumeric display with 4 lines and 20 characters.
- 12 button numeric keypad and 5 direct selection button kit (optional)
- Direct selection button enables virtual selection
- Sound signal to indicate dispensing sequence.
- Ergonomic compartment enabling easy access to the dispensed product.

Temperature

The temperature can be even ((8-12°C) or stratified (separate temperature values for lower trays and upper trays). This can be attained by closing the shutters on the air duct placed on the back wall of the refrigerated box.



Electronic Control

- The 16-bit electronic control with flash EPROM is flexible and comprehensive.
- Allows automatic setup and also provides easy access to statistics via a palmtop device with RS232 connection or IRDA.
- Designed to work well with Astro and Oblò, using master and slave mode. A single payment system can be shared between both machines.
- Lock with programmable code.

PAYMENT SYSTEMS

The payment systems and the electronic board are located inside a separate compartment, with independent access and slide-out opening for complete extraction, allowing work to take place in this area without affecting the temperature inside the product compartment. Rondò is pre-set for the installation of systems with Executive and MDB protocol, as well as validators.

The following can be installed on the same machine:

- Change-giver coin mechanism/validator
- Bill validator
- Cashless system with key or card





AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145 Phone: 1800 28 26 22 sales@ausboxgroup.com.au











ACCESSORIES

Photocell kit


Kit to block dispensing compartment

Additional lamp kit

Coin box cover kit

Wall mounting bracket kit

RS232 jack kit

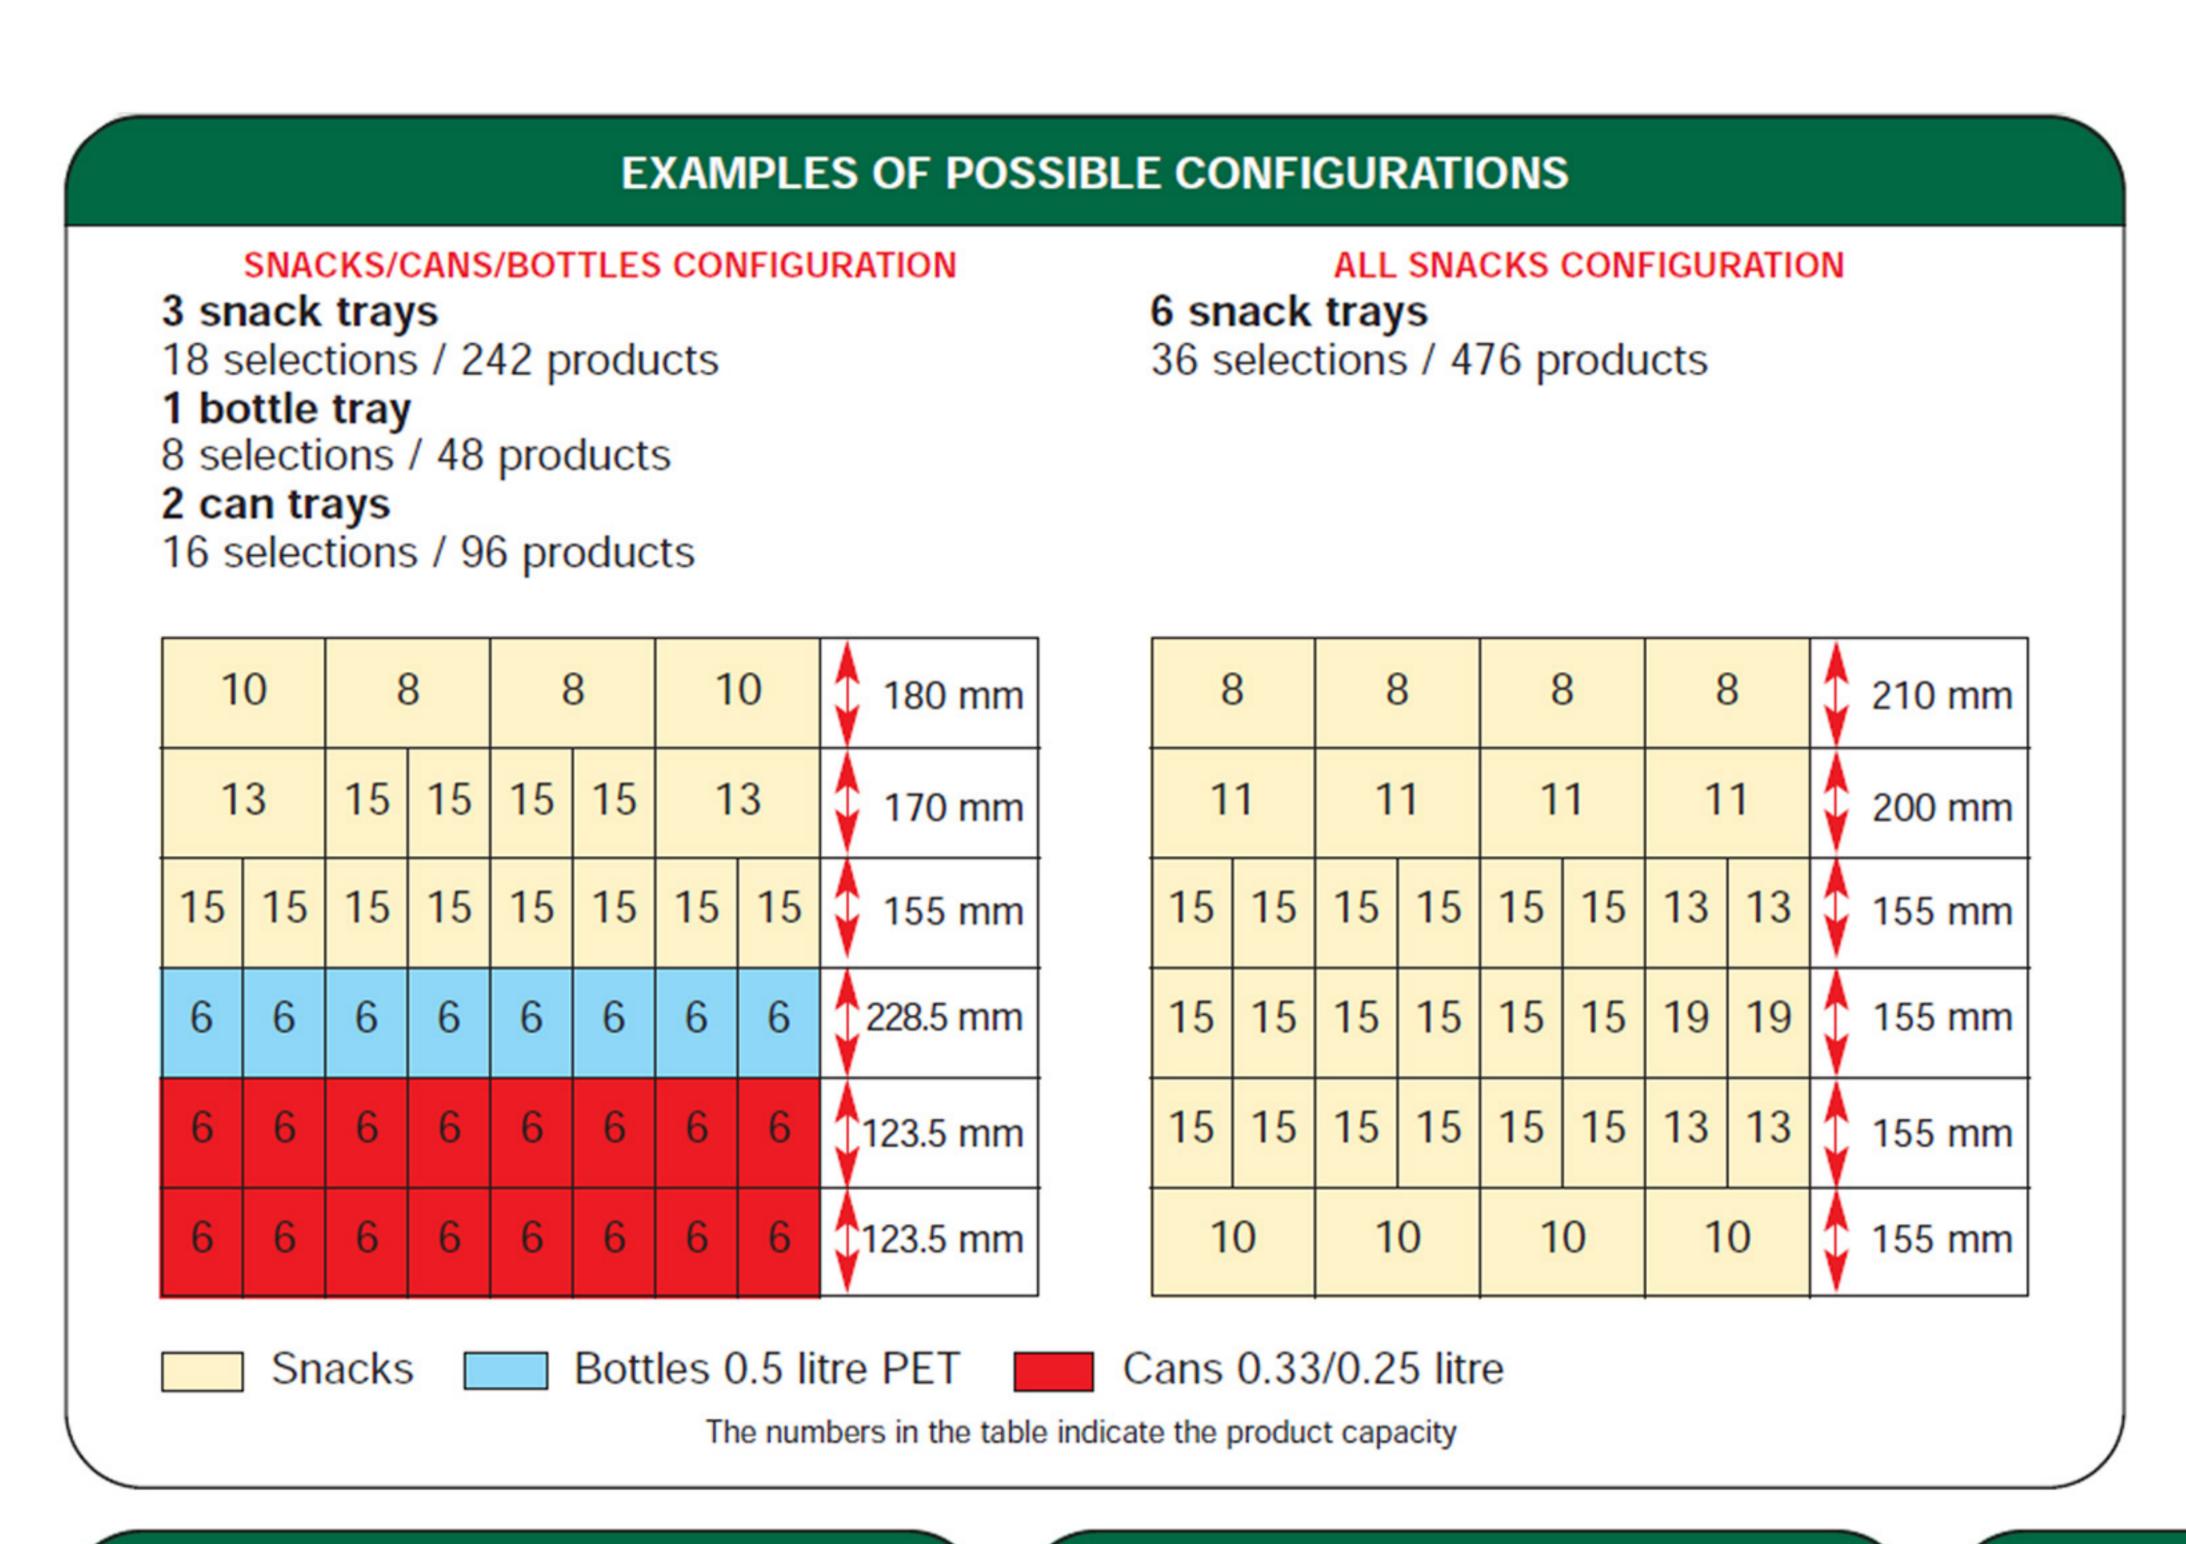

AVAILABLE SPIRALS AND PRODUCT CAPACITY					
RIGHT	LEFT	USEFUL	NUMBER OF PRODUCTS	HALF	
•	•	76	6	NO	
•	•	60	7	NO	
•	•	50	8	NO	
•	•	42	10	NO	
•	•	36	11	NO	
•	•	30	13	NO	
•		26	15	NO	
•	•	20	19	NO	
•		20	19+19	YES	

CHARACTERISTICS				
Height	1830 mm*			
Width	880 mm			
Depth	890 mm			
Overall depth with door open	1500 mm			
Weight	280 kg approx.			
Power supply voltage	230 V			
Power supply frequency	50 Hz			
Installed power	510 W			
Maximum operating conditions	32°C - 65% R.H.			
*Adjustable feet: +10 -10 mm				

POWER CONSUMPTION

For each hour of stand-by

Ambient temperature
Refrigerated box temperature
20°C
5°C

AUSBOX GROUP Vending Machine Solutions

16 Rebecca Road, Malvern East, VIC - 3145

Phone: 1800 28 26 22 sales@ausboxgroup.com.au







